

Description

Hermetic flatpack aluminum case resistor UL marked

MarketIndustrial automation,
Energy**Applications**Dynamic braking,
Charge/discharge capacitors**Mechanical characteristics**IP55, Wire wound on mica plate coated with cement filled with
quartzite sand and sealed with aluminum plug**Special version**

Thermal switch

RFK^{UL}File number:
E228809**250 W ÷ 500 W****UR/CSA MARKING**

refers to room temperature 25°C

ID	Limit voltage	Rated Power	Min Resistance	Max Resistance	Thermal time constant
Unit	V	W	Ω	Ω	s
RFK 250	600	75	1.5	3k6	250
RFK 350	600	100	4	2k4	300
RFK 500	600	150	3	1k8	300

Insulation resistance (1000 VDC) $\geq 1000 \text{ M}\Omega$

Dielectric strength (50Hz; 60") 4000 V

Max Temperature 220°C

Active materials: calculation for min ohmic value are made considering wire material CuNi44, whereas max ohmic value refers to wire material FeCrAl. Resistors can be made also with NiCr alloys. Temp. Coefficient Resistance depends on the used alloy, typically it is between 20 and 240 $10^{-6}/^{\circ}\text{C}$.

The standard version cable is single core with flexible conductor silicone rubber insulated with fiberglass braid.

For cross section AWG14 and AWG16 the cable is classified 200°C – 600 V and made according to UL Style 3071.

The tolerance on cable length is $\pm 5 \text{ mm}$. The choice of cross section to be used depends on the current that flows in the resistor.

Internal thermal switch $160 \pm 5^{\circ}\text{C}$ (rated voltage: 250 V; rated current: 2,5 A; leads single core conductor silicone rubber insulated cross section 0,25 mm^2 length 300 mm), it is an option and must be specified in the order.

Housing is aluminum extrude, it is oxidized to prevent corrosion.

Standard tolerance on ohmic value is $\pm 5\%$.

Overload conditions and energy graphs of RFK 250-350-500 are the same of RFD 150-200-300, they are shown in DS.0314.FDUL.

RFK 250-350-500 and RFD 150-200-300 are built in the same way but for the sealing: RFK has a reinforced aluminum seals, RFD has a resin silicon plug.


Picture above refers to RFK 500.

MECHANICAL DATA

Dimensions [mm]	I	L	Weight [g]
RFK 250	98	113	320
RFK 350	148	163	500
RFK 500	204	219	630

Unless otherwise specified, applicable standard of general tolerances for linear and angular dimensions is ISO 2768-1 class c; applicable standard for aluminum profile is EN 755-9:2008.

DRAWING

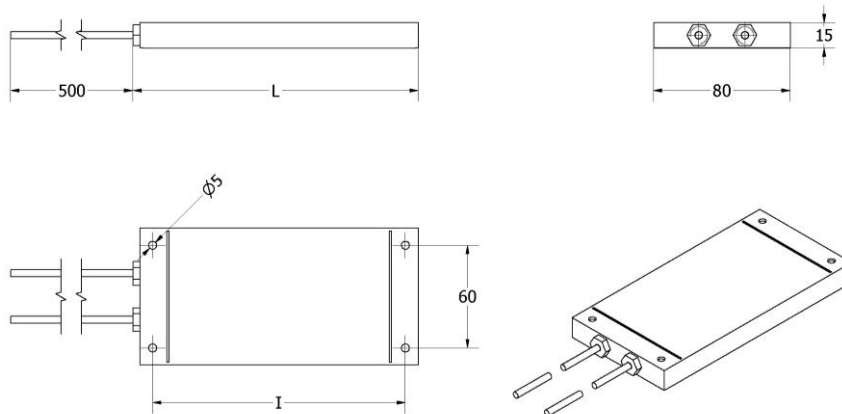


The rated power stated in this datasheet refers to the resistor mounted in horizontal position (with no possibility to exchange heat in the bottom direction) at the ambient temperature of 25°C and 250°C on the external surface. The power dissipation is influenced by:

- Mounting position and arrangement (wall, heat - sink)
- Number of resistors mounted together (grouping)
- Ambient temperature (in free air or inside an enclosure)

Ask the appropriate test reports for more details. See the following graph at page one to know the external temperature corresponding to a certain continuous power.

SURFACE TEMPERATURE CHARACTERISTICS

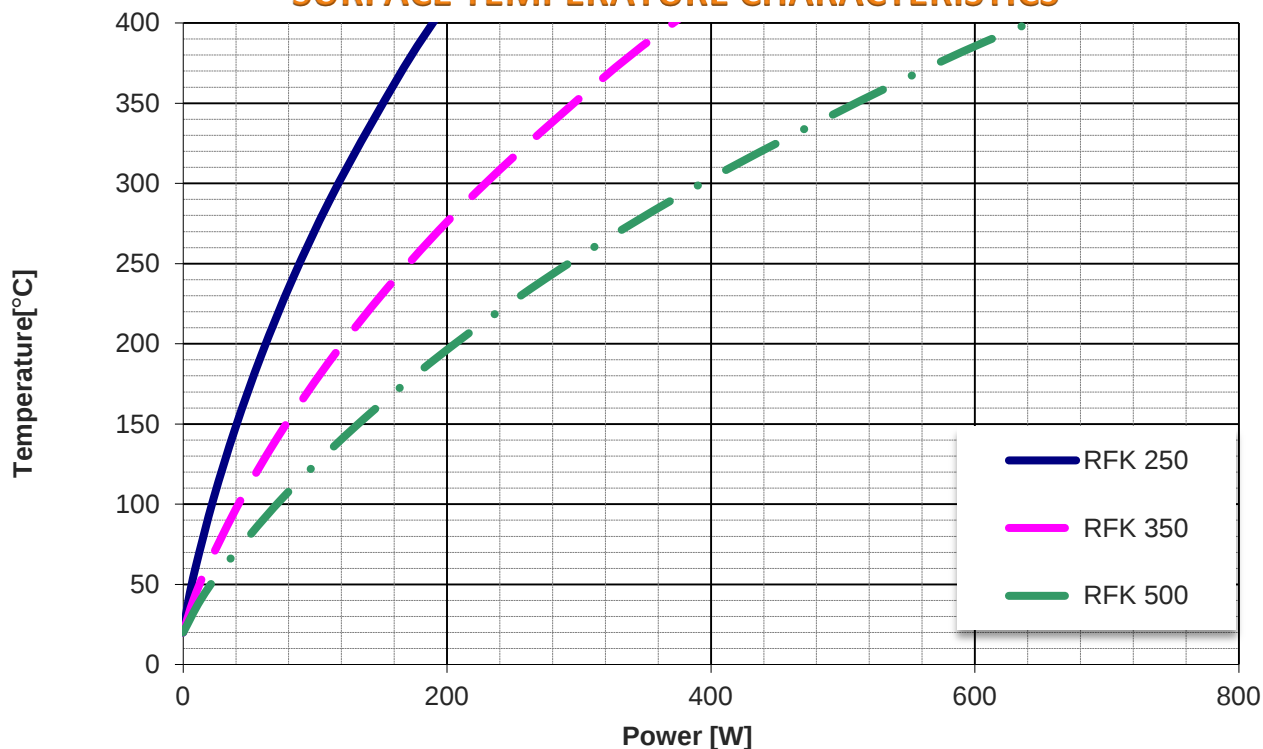

Marking

The resistor is marked on the housing with indelible ink high temperature

FAIRFIELD – RFK 500 150R 5% UL WW/YY (week / year)

Installation

Warning: Units must never be mounted with the terminals uppermost

Packing

The resistor is packed in a way to preserve incidental damages due to transport. To avoid resistor's break we recommend to never take it from the cables and to handle with care inside the original boxes provided by the factory.

Disclaimer

Every effort has been made to ensure that the information in this datasheet is accurate. Fairfield is not responsible for printing or clerical errors. All properties and characteristics mentioned in this datasheet are only for informational purposes. The information in this datasheet is offered solely for your consideration and should not be taken as a warranty or representation for which we assume legal responsibility. The customer bears all responsibility for use and application of Fairfield products. There is no responsibility of the manufacturer for any damage to persons and properties in case of improper use. Fairfield reserves the right to change specifications without prior notice.

Copyright

This datasheet is subject to copyright. Fairfield reserves all rights of translation in any language, reprinting, re-use of illustrations. No part of this publication may be reproduced or transmitted in any form or by any means, electronic, mechanical, photocopying, without the written permission of the copyrighted owner Fairfield, Italy. Violations may be subject to legal proceedings involving monetary damages as well as compensation for costs and legal fees under Italian copyright law and regulation within the European Union.

Ordering information

RFK/Y XXX RRRR 5% UL

Y T: Internal thermal switch $160 \pm 5^\circ\text{C}$ (rated voltage: 250 V; rated current: 2,5 A; leads single core conductor silicone rubber insulated cross section $0,25 \text{ mm}^2$ length 300 mm)

XXX Model 250, 350, 500

RRRR Resistance value (nominal at 20°C)

Example

RFK 500 150R 5% UL

RFK is the name of the product

500 is the model

150R means 150Ω that is the nominal ohmic value at 20°C

5% is the tolerance on the ohmic value, in this case the value of the resistor is accepted when is within $142.5 \Omega \div 157.5 \Omega$